


# Storage tanks type ST 1000 - 20000

## Basic equipment:

- energy saving, insulated coat of the kettle with conical bottom, made of stainless steel W.Nr. 1.4301 (AISI 304) on a stable support
- welded cover with manhole and air valve
- DN 50 inlet (DN65,80)
- DN 50 outflow (DN65,80)
- connections for CIP and washing head
- PT 100 probe nozzle
- digital temperature display
- motoreducer with propeller (turbine stirrer) 23 (60) rpm

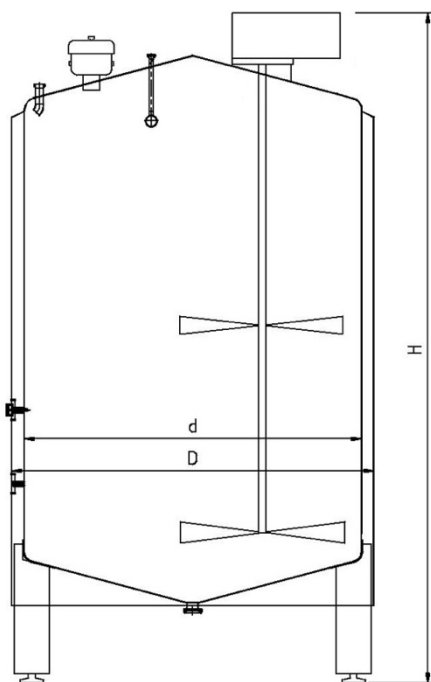

Industry

## Additional equipment:

Type	Dimensions (mm)				Code
	Inside diameter d	Outside diameter D	Height H	Outflow height	
ST 1000	Ø 1015	Ø 1100	2200	300	5.000.30
ST 1500	Ø 1185	Ø 1270	2300	400	5.000.31
ST 2000	Ø 1185	Ø 1270	2750	400	5.000.32
ST 3000	Ø 1430	Ø 1550	2700	400	5.000.33
ST 4000	Ø 1600	Ø 1720	3000	400	5.000.34
ST 5000	Ø 1600	Ø 1720	3600	400	5.000.35
ST 7500	Ø 1800	Ø 1950	3900	400	5.000.36
ST 10000	Ø 2000	Ø 2200	4200	400	5.000.37
ST 15000	Ø 2000	Ø 2200	5700	400	5.000.38
ST 20000	Ø 2200	Ø 2400	6300	400	5.000.39

Type	Insulated cover	Water cooling coat
ST 1000	5.000.75	5.000.60
ST 1500	5.000.76	5.000.61
ST 2000	5.000.76	5.000.62
ST 3000	5.000.77	5.000.63
ST 4000	5.000.78	5.000.64
ST 5000	5.000.78	5.000.64
ST 7500	5.000.79	5.000.65
ST 10000	5.000.80	5.000.66
ST 15000	5.000.80	5.000.67
ST 20000	5.000.80	5.000.67

Equipment	Code
Additional washing head	5.000.91
Washing turbine	5.000.92
Service opening on the side from 5.000l	5.000.93
Pt 100 temperature probe 4 - 20 mA	5.000.95
Pt 1000 temperature probe 4 - 20 mA	5.000.96
Control glass with light DN 100	5.000.97
Basic control panel, start - stop	5.000.98